


"FSP" Series Filtration Combo

Designed for easy set-up domestic pool, "FSP" Series filtration combo offers the right solution for home user who is looking for user-friendly and excellent filtration performance. "FSP" Series Filtration Combo includes top mount plastic filter tank, 4 or 6-way multiport valve, swimming pool pumps attached with base.



Highlight Features:

- Suggested Installation: Domestic swimming pool
- Easy installation with pre-installed plumbing system and base
- Simple operation with 4-way multiport valve
- Filter structure with UV resistance material
- Max operating pressure 28psi / 2.0 bar
- Max temperature of 40°C (104 °F)
- Suggested size of media : 0.5-0.8mm

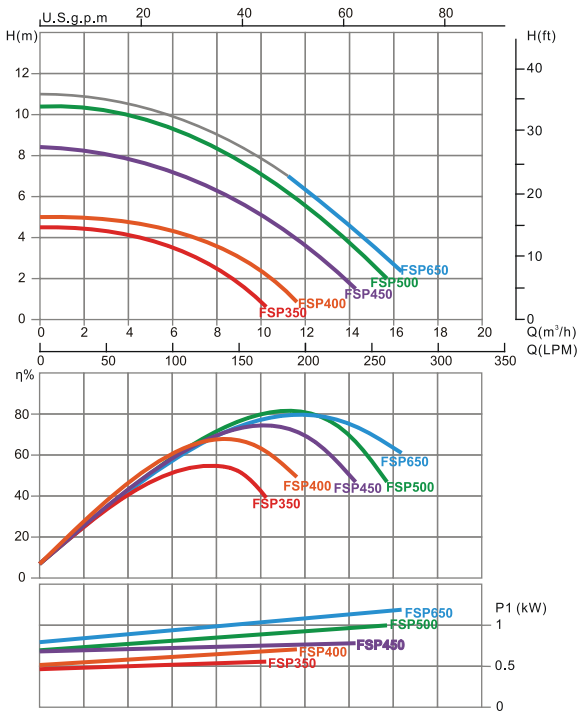


Remarks: Flow curve information based on 220V/50Hz motor.

Technical Information


Code	Model No	Filter	Pump	Valve Connections		Sand(kg)
88031508	FSP350-6W	P350	SS020	1.5 inch	50mm	20
88031609	FSP400-6W	P400	SS033	1.5 inch	50mm	35
88031710	FSP450-6W	P450	SS050	1.5 inch	50mm	45
88031811	FSP500-6W	P500	SS075	1.5 inch	50mm	85
88031912	FSP650-6W	P650	SS100	1.5 inch	50mm	145

Note: Suggested sand weight varies with differences in filter media size. For reference only.

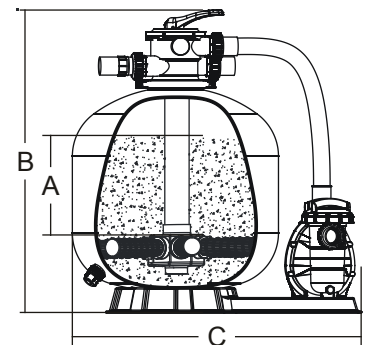

Product Dimension

Model No	A mm	B mm	C mm	D mm	Max Flow Rate	
FSP350-6W	160	680	555	350	72lpm	4.32m³/h
FSP400-6W	175	759	760	400	108lpm	6.48m³/h
FSP450-6W	210	813	760	449	135lpm	8.10m³/h
FSP500-6W	235	856	760	527	185lpm	11.10m³/h
FSP650-6W	300	961	760	627	260lpm	15.60m³/h

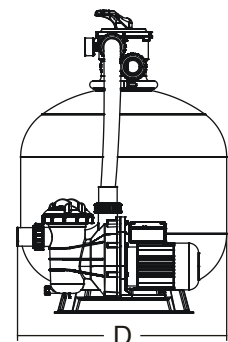

FOR PUMP ONLY

